

# APM and Power Connector Replacement Instructions

## Tools Required:

- Phillips Screwdriver (used to open the equipment compartment and control box).

## APM and Power Connector Kits Include:

- Auxiliary Power Module (APM) (powers Receiver from spa via Power Connector).
- or
- Power Connector (connects between APM and Spa control box).



APM Power Supply  
(1118001)




Power Connector  
(1118101)

1. **DISCONNECT ALL POWER** to the spa.
2. Remove the spa equipment compartment door.
3. Remove the cover from the control box.

## STEP 4

Used in Step 5

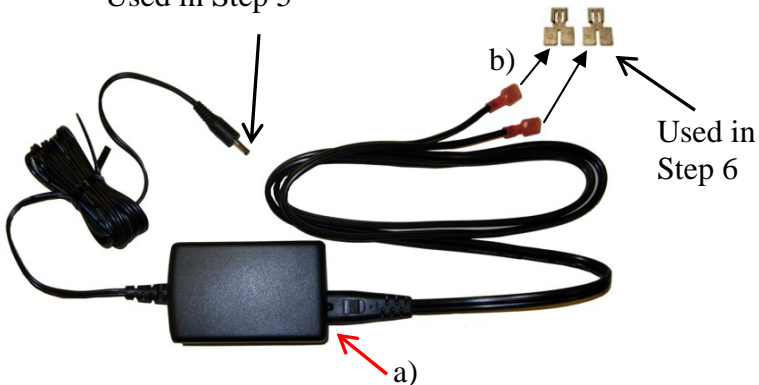


- a) Attach the APM Power Supply to the Power Connector.
- b) Attach Female Quick Disconnect Y Adaptors to ends of the Power Connector.

## STEP 5



Attach the APM Power Supply to the Receiver.

## STEP 6

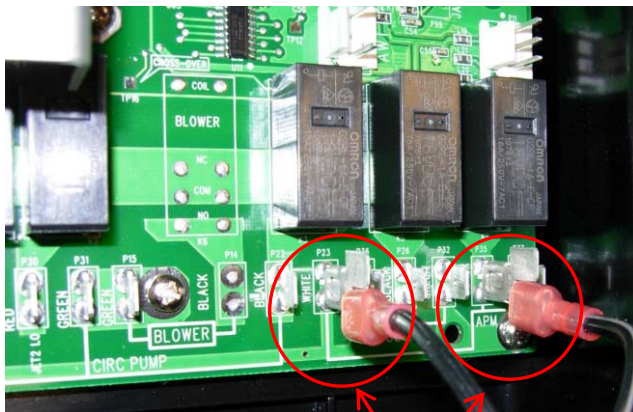

Locate the APM Terminals on bottom right hand corner of the control box. Attach the Power Connector with Y Adaptor to P23 & P35, as illustrated to the left.