

# Installing the Floating Weir and Removal of the Safety Suction Assembly

## NOTE: For Older Tiger River Models Only


### Recommended Tools

Spring Clamp Pliers  
Hose Clamping Pliers

### Required Supplies

Floating Weir Kit (PN 71944)

1. Remove the filter lid.
2. Unscrew the filter cap and remove the filter from the well.
3. Remove the current weir by pulling it straight out.
4. Install the **floating weir** by inserting it at a slight angle into the filter opening and pushing it in until it snaps into place.
5. Replace the filter and cap.
6. Replace the filter lid.
7. Remove the equipment compartment door.
8. Located the check valve on the left side of the equipment compartment.  
(See Figure 1).

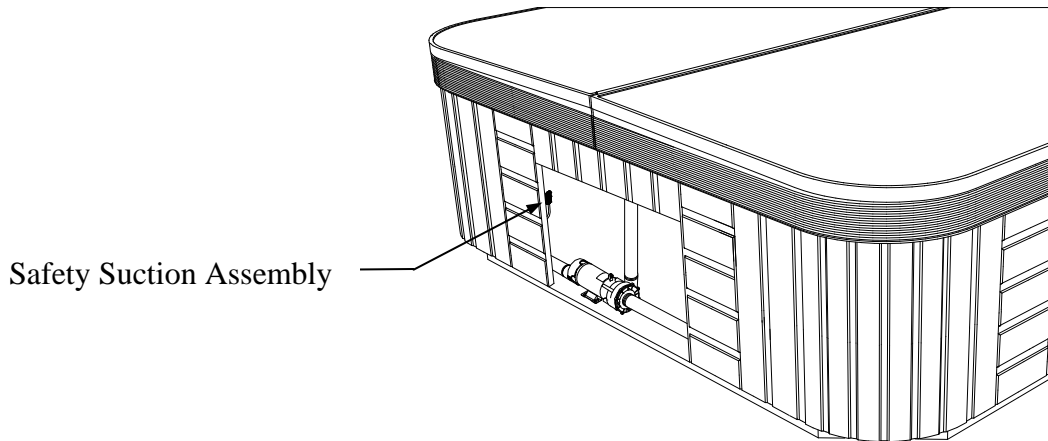

**Figure 1**

9. Pinch off the 1/4" line below the check valve using the hose clamping pliers.
10. Using the spring clamp pliers slide the spring clamp off the check valve.
11. Remove the safety suction assembly.
12. Install the 1/4" plug onto the 1/4" line. Reinstall the spring clamp.
13. Remove the hose-clamping pliers.
14. Inspect for leaks.
15. Verify all spa functions.
16. Replace the equipment compartment door.